

RG50M775 直流减速电机 DC GEAR MOTOR Series



TWIRL MOTOR




电压/Main voltage: 3VDC、6VDC、9VDC、12VDC、24VDC、36VDC

用途/Typical applications: 垃圾处理、自动贩卖机、蠕动泵、望远镜、自动门、电视广告、医疗器械、ATM银行系统、家用电器、执行器、办公设备
Garbage disposers, Slot machine, Peristaltic pump, Angular telescope, Automatic door, Electric advertising, Medical equipment, ATM bank automatic system, Household appliances, Automatic actuator, Office equipment.

重量/Weight: 600~650g/pcs(approx)

包装外形尺寸/Packing details: CTN size: 34X31XH15cm 20pcs/CTN G.W.15kgs

外形尺寸 APPEARANCE SIZE

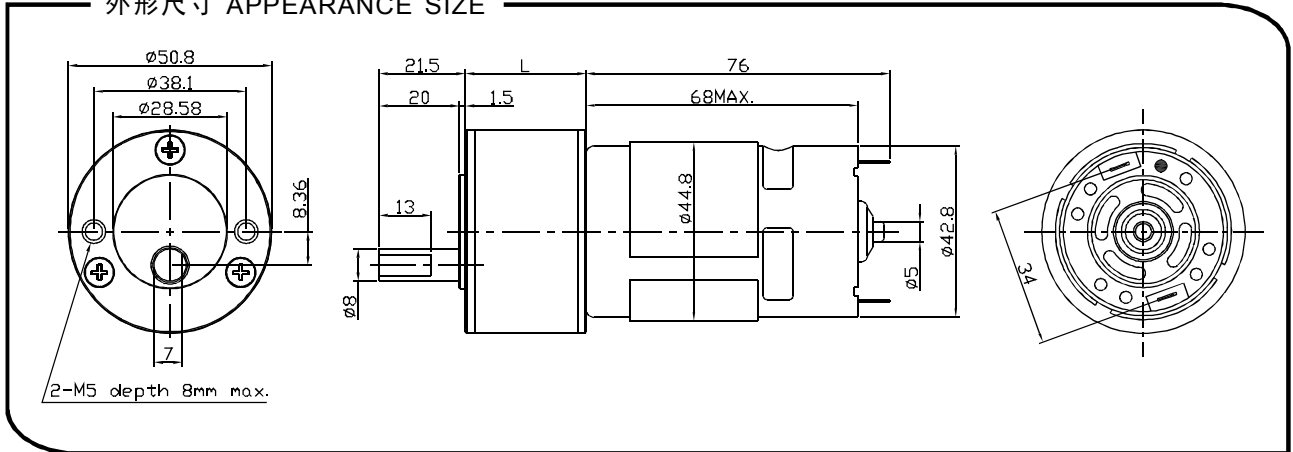

齿轮箱数据 Gearbox data

减速箱级数 Number of stages	2、3 减速比 Stages reduction	4、5 减速比 Stages reduction	6 减速比 Stages reduction
减速比 Reduction ratio	7.5、13.8; 30、55	120、220; 480、883	1920、3532
齿轮箱长度 Gearbox length "L" mm	26.4	30.2 33.9	37.7
最大运转力矩 Max. Running torque	10kgf.cm	30kgf.cm	30kgf.cm
最大破坏力矩 Max. Gear breking torque	30kgf.cm	75kgf.cm	75kgf.cm
最高齿轮效率 Max. Gearing efficiency	81%; 73%	65%; 59%	53%

其它减速比请致电或邮件给我司技术部 Other reduction ratio please telephone or e-mail to our engineering department.

马达参数 Motor data

马达型号 Motor Model	电压 Rated Volt. V	空载 No load		负载 Load torque				堵转 Stall torque	
		电流 Current	转速 Speed	电流 Current	转速 Speed	扭矩 Torque	输出功率 Output power	扭矩 Torque	电流 Current
		mA	r/min	mA	r/min	gf.cm	W	gf.cm	A
RS-775123000	12	≤220	3000	≤1000	2500	350	7.7	1400	3.5
RS-775124500	12	≤450	4500	≤2000	3300	500	16.5	2000	6.5
RS-775126000	12	≤900	6000	≤4000	4500	750	34	3000	13.0
RS-775243000	24	≤110	3000	≤500	2200	350	7.7	1400	1.8
RS-775244500	24	≤230	4500	≤1000	3300	500	16.5	2000	3.3
RS-775246000	24	≤450	6000	≤2000	4500	750	34	3000	7.0

- 马达和齿轮箱装配成减速电机后输出扭矩 = 马达扭矩×减速比×齿轮效率; 输出转速 = 马达转速 / 减速比 .
- After connecting motor and gearbox which is named gearmotor the output torque: motor torque X reduction ratio X gearing efficiency; output speed: motor speed/reduction ratio .